




DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: FEMALE TERMINAL

PART NO: 3000H19/-5

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H19A-5	.020 ±.001 THK. BRASS PRETINNED	SEE MAT'L	YES
3000H19AB-5	.020 ±.001 THK. BRASS	NONE	YES
3000H19AD-5	.020 ±.001 THK. BRASS	ELECTRO-TIN	YES
3000H19J-5	.018 ±.001 C.R. STEEL	NICKEL PLATE	NO

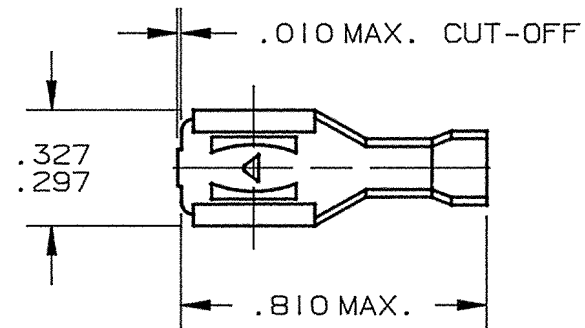


NOTES:

- TO FIT STANDARD .250 X .032 MALE TAB.
- TO ACCEPT #14-#20 GAUGE WIRE.
INSULATION RANGE: .075-.150 DIA.
- RECOMMENDED STRIP LENGTH: 7/32 ±1/32
- FOR PARTS LESS DIMPLE ADD SUFFIX "-3" TO PART NUMBER. (I.E. 3000H19A-5-3)
- FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
- FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H19A-5-1)
- INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING MALE TEST TAB 3000M68H-1.
 1ST INSERTION: 12.0 LBS MAX.
 6.0 LBS MIN.
 1ST WITHDRAWAL: 17.0 LBS MAX.
 6.0 LBS MIN. AVERAGE
 4.0 LBS MIN. INDIVIDUAL
 6TH WITHDRAWAL: 5.0 LBS MIN. AVERAGE
 4.0 LBS MIN. INDIVIDUAL




ARK-LES
UNCONTROLLED

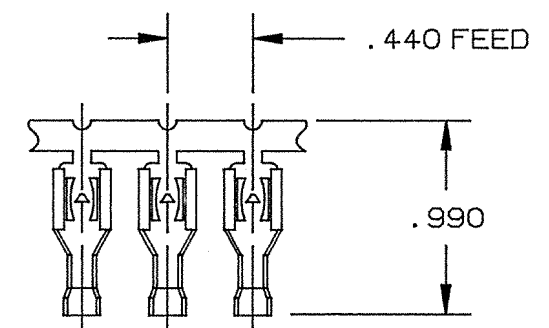

FABRICATED TERMINAL STRIP

SCALE: FULL

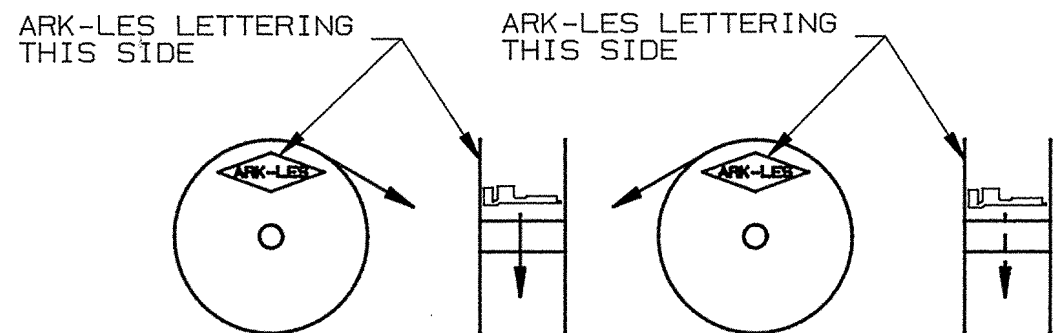

STANDARD REELING
(I.E. 3000H19A-5)

REVERSE REELING
(I.E. 3000H19A-5R)

REELING DIAGRAMS

			PROD. REL.	3/2/65		TOLERANCES UNLESS OTHERWISE SPECIFIED:		
			QUOTE REL.	1/12/65		DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
			DR:	R. TASTULA	5/18/95	MATERIAL: SEE TABLE		
			CHK'D:	R.W.T.	5-27-97	FINISH: SEE TABLE		
U	REVISED PER ECR #11289	5/23/97	RT	APP: Cor	6-3-97	PART NO: 3000H19/-5		
T	REVISED & REDRAWN PER ECR #10434	5/18/95	RT	SUPERCEDES DWG. DATED: 6/4/92				
REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: BT00032			

ORIGINAL