


DEPT	
1	I
2	
3	
4	I
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	


PART NAME: TERMINAL, FEMALE

PART NO: 3000H4A/(59)

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H4A(59)	.020 ±.001 BRASS PRETINNED	SEE MAT'L	YES
3000H4AB(59)	.020 ±.001 BRASS	NONE	YES

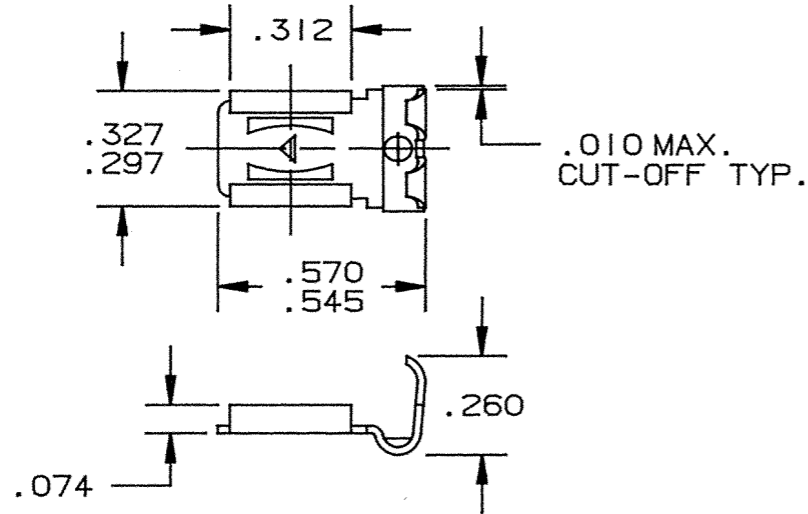


- NOTE:
1. TO ACCEPT .250 X .032 MALE TAB.
  2. WIRE RANGE: #14-#20 AWG.
  3. RECOMMENDED STRIP LENGTH: 11/32 ±1/32.
  4. ADD "R" TO PART NUMBER FOR REVERSE REELING. (I.E. 3000H4AR(59))
  5. WIRE LEADS MAY BE ATTACHED IN A SPECIAL APPLICATOR WHICH FORMS ONE WIRE GRIP EAR TO PROVIDE AN INSULATION GRIP. THIS CAN ONLY BE USED ON WIRES WITH SMALL INSULATION DIAMETERS IN THE RANGE OF .040 - .120 O.D. (#18-#20 GAUGE WIRE ONLY)
  6. RECOMMENDED STRIP LENGTH: 3/16 ±1/32.
- FIRST INSERTION FORCE TO BE 5-9 LBS.  
ALL OTHER REQUIREMENTS ARE PER CURRENT NEMA DC2-19XX & UL310 SPECIFICATIONS.

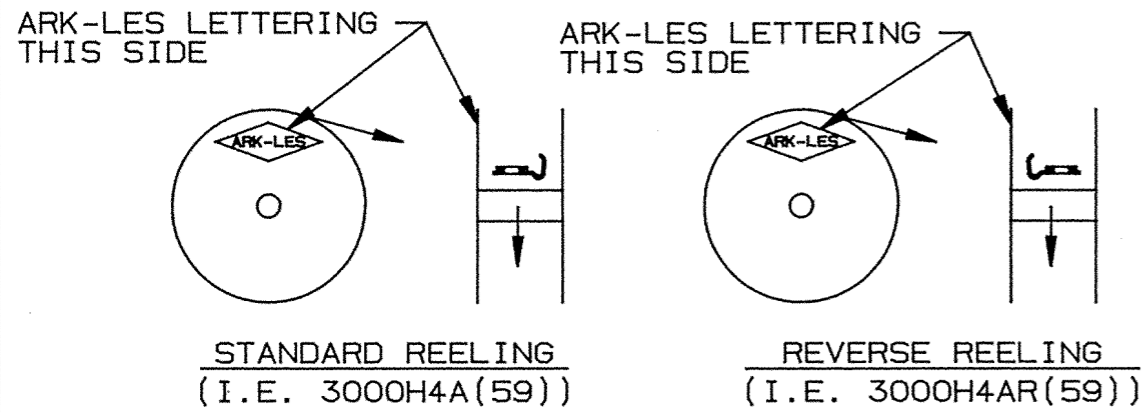

REELING DIAGRAMS

**ARK-LES**  
**UNCONTROLLED**

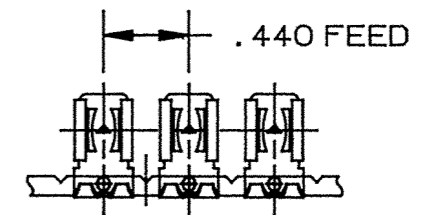

FABRICATED TERMINAL STRIP

SCALE: FULL

**ORIGINAL IF RED**

			PROD. REL.	JM3186	7-13-93	R.T.	TOLERANCES UNLESS OTHERWISE SPECIFIED:
			QUOTE REL.				DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
			DR:	M. BUMILA	6-22-93		MATERIAL: SEE TABLE
			CHK'D:	R.W.T.	6-23-93		FINISH: SEE TABLE
			APP:	Bishop	7-13-93		PART NO: 3000H4A/(59)
A	PROD. REL. PER ECR #9685	6-22-93	M.B.	SUPERCEDES DWG. DATED:			
REV.	DESCRIPTION	DATE	DR.	SCALE: 2X	CAD NO: BT00072		

(A)

(A)