




| | |
|------|---|
| DEPT | |
| 1 | 1 |
| 2 | |
| 3 | |
| 4 | 3 |
| 5 | |
| 6 | |
| 7 | |
| 8 | |
| 9 | |
| 10 | |
| 11 | |
| 12 | |
| NC | |
| JZ | |
| DW | |

PART NAME: FEMALE TERMINAL

PART NO: 3000H19/-4-2


| PART NUMBER | MATERIAL | FINISH | Q.C. STAMP |
|---------------|------------------------------------|--------------|------------|
| 3000H19A-4-2 | .020 ±.001 THK. BRASS PRETINNED | SEE MAT'L | YES |
| 3000H19AB-4-2 | .020 ±.001 THK. BRASS | NONE | YES |
| 3000H19AC-4-2 | .020 ±.001 THK. BRASS | SILVER PLATE | YES |

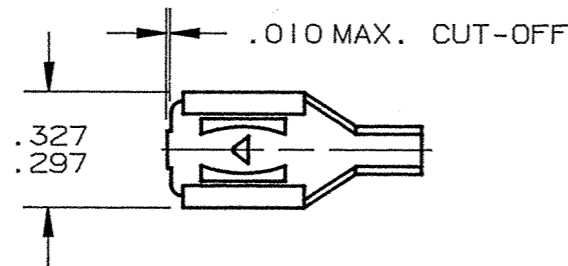

NOTES:


- TO FIT STANDARD .250 X .032 MALE TAB.
- TO ACCEPT #16-#22 GAUGE WIRE.
- RECOMMENDED STRIP LENGTH: 7/32 ±1/32
- FOR PARTS LESS DIMPLE ADD SUFFIX "-3" TO PART NUMBER. (I.E. 3000H19A-4-2-3)
- FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
- FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H19A-4-2-1)
- INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING MALE TEST TAB 3000M68H-1.
 - 1ST INSERTION: 12.0 LBS MAX.
6.0 LBS MIN.
 - 1ST WITHDRAWAL: 17.0 LBS MAX.
6.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL
 - 6TH WITHDRAWAL: 5.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL

(E)

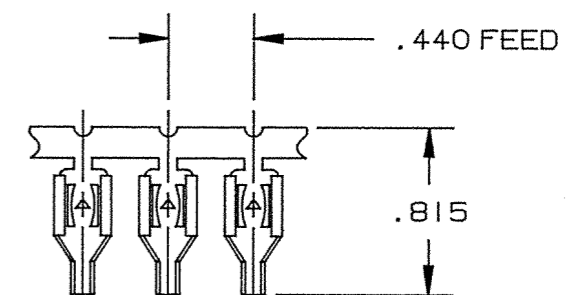

ARK-LES LETTERING THIS SIDE

ARK-LES LETTERING THIS SIDE

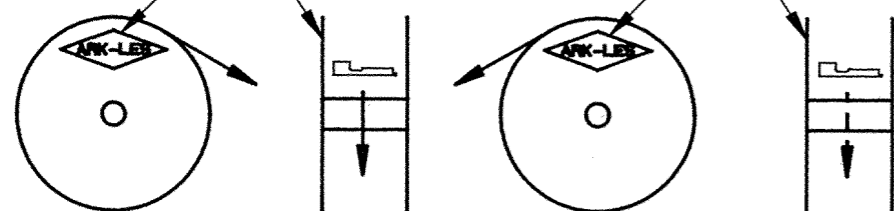

STANDARD REELING
(I.E. 3000H19A-4-2)

REVERSE REELING
(I.E. 3000H19A-4-2R)

REELING DIAGRAMS

ARK-LES
UNCONTROLLED FABRICATED TERMINAL STRIP

SCALE: FULL

| | | | | | | | | | |
|------|----------------------------------|---------|------------|------------------------|-----------------|----|--|----------------|------------|
| | | | PROD. REL. | PER DW | 4/30/74 | PC | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | |
| | | | QUOTE REL. | | | | DECIMALS ±.010 | METRIC ±0.25mm | ANGLES ±1° |
| | | | DR: | R. TASTULA | 5/18/95 | | MATERIAL: SEE TABLE | | |
| | | | CHK'D: | R.W.T. | 5-23-95 | | FINISH: SEE TABLE | | |
| | | | APP: | cor | 9-23-95 | | PART NO: 3000H19/-4-2 | | |
| E | REVISED & REDRAWN PER ECR #10434 | 5/18/95 | RT | SUPERCEDES DWG. DATED: | 6/4/92 | | | | |
| REV. | DESCRIPTION | DATE | DR. | SCALE: 2:1 | CAD NO: BT00031 | | | | |